

# MW15943L MIMO Wall Mount Antenna

Model: DX-6996/6996/1727/1727-70/70-6/7-NK/53-20/153-1.5-W



## Features and Product Description


- Wideband, support 2G/3G/4G
- High Gain
- RoHS Compliant
- Low PIM
- High reliability

## Electrical Specifications

Port	Port1		Port2	
Frequency range (MHz)	698 - 960	1710 - 2700	698 - 960	1710 - 2700
Polarization	$\pm 45^\circ$		$\pm 45^\circ$	
VSWR	$\leq 1.5$		$\leq 1.5$	
Gain (dBi)	$7 \pm 1$	$8 \pm 1.5$	$7 \pm 1$	$8 \pm 1.5$
Horizontal half-power beam width (°)	$70 \pm 15$		$70 \pm 15$	
Vertical half-power beam width (°)	$70 \pm 15$		$70 \pm 15$	
Front to Back Ratio (dB)	$\geq 15$		$\geq 15$	
Isolation (dB)	$\geq 20$		$\geq 20$	
PIM, 3rd Order (dBc)	$\leq -153$ (2 x 43 dBm carrier)			
Average power, maximum (W)	50			
Impedance ( $\Omega$ )	50			
Grounding	DC Ground			

## Mechanical Specifications

Dimensions (H x W x D) (mm)	320×210 × 75
Packing dimensions (H x W x D) (mm)	400×240×90
Net weight(with installation kit) (kg)	$\leq 1.2$
Packing weight (kg)	$\leq 1.5$
Radome material	UV ABS
Application	Indoor / Outdoor
Operating temperature (°C)	-40 to +65
Rated Wind Velocity (km/h)	$\geq 210$
Connector	2 x N-Female

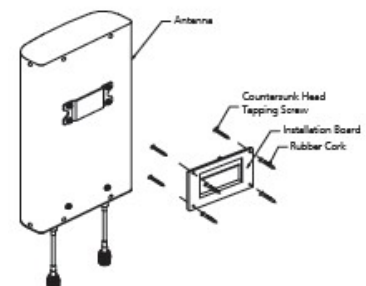

## Installation Steps

1. Screw the antenna with installation board to the installation board on the wall.
2. Connect the cable to the antenna connector and tighten it.

© Copyright 2019 APG Technologies, Inc. All rights reserved.

All specifications are subject to change without notice. Please contact your APG representative for complete performance data.

[APG Technologies, Inc.](http://www.apgtechnologies.com)